



- Standard Analogue phone or SIP phone
- Aluminum alloy die-casting body
- Vandal resistant metal button
- Handsfree operation
- Two button for emergency call
- Weather proof protection to IP66
- Wall mounting, simple installation
- Phone line powered(Analogue)
- External power supply or PoE (SIP-VoIP)
- RJ45 port for SIP phone
- CE, FCC, ROSH compliant

The JR100 series telephones are fully contained within a corrosion resistant cast aluminium weatherproof case and cold rolled steel faceplate with a door providing complete protection against dust and moisture ingress, resulting in a highly reliable product with a long MTBF. Extremely easy to install. The cable entrance is on the back of the phone to prevent from artificial damage, while the keypad is weather and vandal resistant. The JR100 series Weatherproof Telephones are designed for use by the railways, power stations, the armed services and heavy industry which require very reliable telephony under adverse conditions.

Standard Analogue

As a standard analogue telephone, this unit provides basic telephone functions and can be connected to any standard two-wire telephone line, including analogue PABX lines and PSTN.

SIP-VoIP TECHNICAL SPECIFICATIONS

Power Input:

12-24V DC

Port:

WAN: 10/100Base-T RJ-45 for LAN, Auto MDIX

LAN: 10/100Base-T RJ-45 for PC, Auto MDIX

Power Consumption:

Idle: 1.5W/ Active: 1.8W

Voice Features

- Support SIP 2.0 (RFC3261)
- Codec: G.711A/u, G.7231 high/low, G.729, G.722
- Echo cancellation: Support G.168 and hand-free can support 96ms
- Supports full duplex
- SIP support SIP domain, SIP authentication(none, basic, MD5), DNS name of server
- DTMF: SIP info, DTMF Relay, RFC2833
- Call control features: Flexible dial map, support hot-line

Network Features

- WAN/LAN: support Bridge mode
- Support static IP address
- Support DHCP get IP on WAN port
- Support VLAN
- Support web config

TECHNICAL SPECIFICATIONS

Casing Material

Die cast aluminium body, cold rolled steel
paceplate epoxy powder coated.

Colors

Yellow, other colors to special order

Handset Material

No handset

Keypad

No Keypad

Temperature

Operating: -30°C to +65°C

Storing: -40°C to +75°C

Weather Resistance

IP66

Ringling Tone

Shrill warble tone 90 dBA @ 1 metre
typical

Hook switch

No hook switch

Push button

Vandal resistant stainless steel button

M.T.B.F.

Calculated to have an M.T.B.F. in excess
of 50,000 hours using

Weight

Up to 6 kg depending on option

ANALOGUE

Dialing

MF (tone)

Power supply

Drawn from telephone line


Lightning / Transients

Protection to ITU-T k.21 enhanced levels

Programming

Can be programmed remotely by DTMF
tone or build-in keypad

DIMENSIONS:

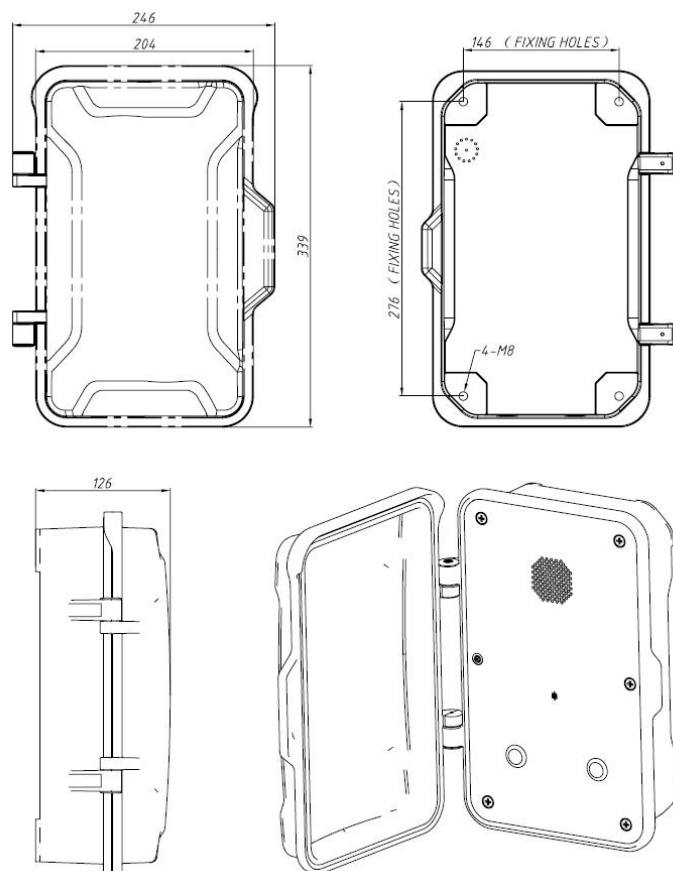

(Measured in mm)

APPROVALS



This mark indicates compliance with the:
Radio & Telecommunications Terminal Equipment
Directive
2004/108/EC



This mark indicates compliance with the:
FCC Part 15 Subpart B Class B

PACKAGE

unit size: 204 *334 *126(mm)

Carton size:200*300*440(mm)

Packaging materials: pearl cotton, carton

Gross weight: 7KG Net weight: 6KG